

# Peracetic acid sensor PES7



- Disinfection process in food industry
- Ranges: 0...2000 ppm
- Unnecessary zero adjustment
- Only 1 point requested for calibration

## TECHNICAL FEATURES

Measured parameter	Peracetic acid
Applications	Disinfection in food industry (e.g.: Bottles cleaning, CIP); Industrial water, sea water Surfactants are not tolerated
Measuring system	Closed cell with 2 electrodes and electrolyte
Supply voltage	12 ... 30 V DC (Load from 500 to 900 Ω)
Output signal	4...20 mA, 2-pole terminal block (2x1mm <sup>2</sup> ) No galvanic insulation
Operating temperature	1 to 45 °C Automatic temperature compensation
Operating pressure	0.5 bar max (without vibration and/or pulsation) Option: 1 bar max. with safety ring (on request)
Flow-rate	About 15 to 30 l/h
pH operating range	Between pH 1 and pH 6
Calibration	Only 1 point with BAMOPHAR 194
Interferences	O <sub>3</sub> is measured with a factor of 2500 ClO <sub>2</sub> is measured, equivalent by a factor 1 H <sub>2</sub> O <sub>2</sub> is measured, equivalent by a factor 0.005 Sulfuric and nitric acids do not interfere if their concentrations are below 1%
Materials	PVC-U and AISI 316 Ti (1.4571)
Dimensions	Dia 25 mm, length 220 mm (4-20mA)

**CE conformity:** The device complies with the legal requirements of current European Directives.

## CODE NUMBERS AND REFERENCES


Code	Reference	Measuring range	Resolution
193 187	PES7.MA.MM	0...2000 ppm	
<b>Spare parts</b>			
193 904	M7N	Diaphragm for PES7 sensor	
193 960	EPS 7/W	Electrolyte for PES7 sensor (100 ml)	

*Other versions on request*

### Precautions

Flow rate must be constant and a measuring cell with flow controller is necessary (data-sheet 193-95).

In order to install easily a complete system, we propose assemblies designed for specific applications (on request)

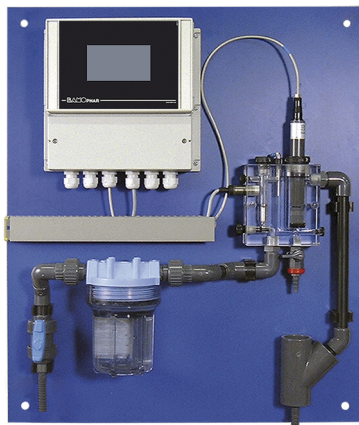

Complete measuring system  
(assembly sold separately)

**BAMO INTERNATIONAL**

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web [www.bamo.eu](http://www.bamo.eu)

Fax +33 (0)1 34 10 16 05 E-mail [export@bamo.fr](mailto:export@bamo.fr)

Peracetic acid sensor  
**PES7**

16-04-2025

D-193.30-EN-AD

CL

193-30/1