

Parts SFA series

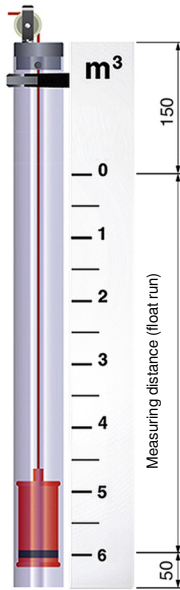


Fig. 1

GRADUATED RULERS


Material	PVC, white
Section	U shape (70 x 35 mm)
Marks	Black printed
Top blind zone	150 mm
Bottom blind zone	50 mm
Units	% Metric [cm] Volume Weight

When total length is greater than 2.30 m:

Unless otherwise specified, equipment with heights greater than 2.30 meters is made of two interlocking parts.

Position of markings:


Unless otherwise specified, (as shown in Fig.1), the graduated scale is on the left side (for mounting the ruler to the right of the tube).

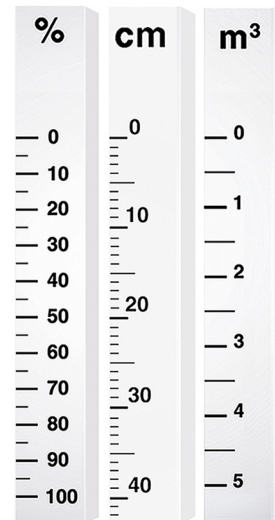

Graduated ruler for SFA & SFA/E



Level switch BSM 501



Level contact BRK

LEVEL SWITCHES

They have a bistable behavior: they remain on the last position actuated by the magnetic counterweight; Change of status occurs when counterweight is passing back.

Level switch BSM 501, see data-sheet 585-01; Level contact BRK 60, see data-sheet 585-02.

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Parts SFA series

22-02-2019

D-583.03-EN-AA

NIV

583-03/1

CODE NUMBERS AND REFERENCES

Code	Reference	Description
583 200	SFA/T	Pulley, PPH & AISI brackets, top of tube (tapping the tube)
583 250	SFA/R	Pulley, top of tank, PPH & AISI bracket (fixing: 2 screws, not supplied).
583 260	SFA/TR/PLAS	Set of 2 pulleys, all plastic, for tube & tank, PP/PVC
583 760	PE/SFA	Gastight pulley (for solvent welding on transfer tubes), ND 32
583 212	FI/102/SFA	Float AISI 316 L, spherical, Ø 102
583 300	FI/200/SFA	Float, ballast type, AISI 316 L, Ø 200 (possibility to load weight, sand/water)
583 302	FI/200/SFA OG	Float, ballast type, AISI 316 L, Ø 200, with guide rings (possibility to load weight, sand/water)
583 370	FP98/SFA	Float, PPH, Ø 98, h = 110, S.G. min. 0.94, for CP63 & CP50, includes fixing device for rope fitting
583 374	FP90/SFA	Float, PPH, Ø 90, h = 100, for CP40, includes fixing device for rope fitting
583 371	FP/SFA/PVC	Float, PVC, Ø 98, S.G. min 1.44, for CP63, includes fixing device for rope fitting
583 380	FP/C/SFA/PVC	Float, PVC, Ø 98, S.G. min. 1, for CP63, includes fixing device for rope fitting
583 372	FP/SFA/PVDF	Float, PVDF, Ø 80, S.G. min. 1, for CP63, includes fixing device for rope fitting
583 403	CP63/SFA	Counterweight, built-in magnet, PVC, Ø 50, for tube Ø 63 x 57
583 401	CP50/SFA	Counterweight, built-in magnet, PVC, Ø 40, for tube Ø 50 x 42.6
583 404	CP40/SFA	Counterweight, built-in magnet, PVC, Ø 32, for tube Ø 40 x 34
583 500	CIM/SFA	Cable, AISI 316, Ø 1 (supplied at requested length)
583 550	SC/SFA	Clamp, AISI 316, to fit stainless steel cable to stainless steel float
583 552	SCCP/SFA	Clamp, AISI 316, to fit stainless steel cable on PVC counterweight
583 560	CPM/SFA	Rope, PP, Ø 3 (supplied at requested length)
583 566	CT/SFA	Rope, PTFE, Ø 3 (supplied at requested length)
583 570	TT/SFA	Guide tube, transparent PVC, Ø 63 x 57
583 575	CTB/SFA	Adjustable tee with PE collar Ø 63, to fit guide tube to tank

All dimensions are in mm



BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL
 Tel +33 (0)1 30 25 83 20 Web www.bamo.eu
 Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Parts
SFA series

22-02-2019

D-583.03-EN-AA

NIV

583-03/2

583

583