

Inclined-seat filter unit RVDV – RVIT

- Mounting in any position
- Maintenance without disassembling
- Strainer: 1.5 mm



RVDV




RVIT

TECHNICAL FEATURES

Body	PVC
Seals	EPDM
Strainer	PVC
Fittings	ND10 to ND50: Spigot ends for solvent welding ND65 to ND100: Socket ends for solvent welding
Standard strainer:	1.5 mm

EC Conformity: The instrument meets the legal requirements of the current European Directives.

DIMENSIONS

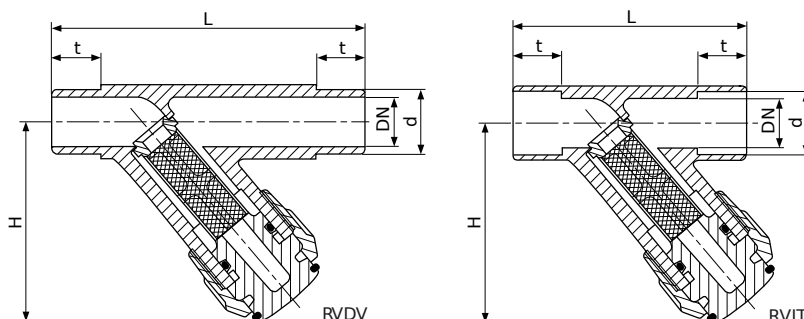

CODE NUMBERS AND REFERENCES

		Spigot ends (RVDV)					
Code	Reference	d	ND	PN	H	t	L
955 157	FT-P10-M	16	10	16	72	14	114
955 158	FT-P15-M	20	15	16	72	16	124
955 159	FT-P20-M	25	20	16	84	19	144
955 160	FT-P25-M	32	25	16	95	22	154
955 161	FT-P32-M	40	32	10	110	26	174
955 162	FT-P40-M	50	40	10	120	31	194
955 163	FT-P50-M	63	50	10	139	38	224

		Socket ends for solvent welding					
Code	Reference	d	ND	PN	H	t	L
955 165	FT-P65-F	75	65	6	179	44	243
955 180	FT-P80-F	90	80	4	192	51	262
955 185	FT-P100-F	110	100	4	231	61	325

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Inclined-seat filter unit
RVDV – RVIT

15-10-2021

D-955.01-EN-AA

PLAS

955-01 /1