

In-line filter unit FTL S4




- Radial mounting and dismounting
- Transparent body
- Optimal passage features
- Strainer: 1.8 x 3.4 mm

TECHNICAL FEATURES

Body	PVC
Sealing	EPDM
Strainer	PP
Fittings	Socket ends unions for solvent welding (Other type on request)
Standard strainer:	1.8 x 3.4 mm

EC Conformity: The instrument meets the legal requirements of the current European Directives.

CODE NUMBERS AND DIMENSIONS

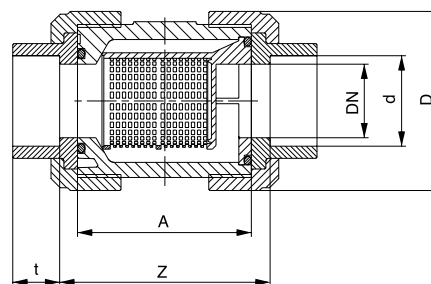

Code	Reference	d	ND	A	Z	t	D	PN *
955 010	FTL S4 - d 16	16	10	62	71	14,5	52,5	16
955 015	FTL S4 - d 20	20	15	62	68	16	52,5	16
955 020	FTL S4 - d 25	25	20	69	79	17	62	16
955 025	FTL S4 - d 32	32	25	73	84	19,5	69,5	16
955 032	FTL S4 - d 40	40	32	83	96	22	84	16
955 040	FTL S4 - d 50	50	40	94	114	25	100	16
955 050	FTL S4 - d 63	63	50	108	134	29	120	16
955 065	FTL S4 - d 75	75	65	133	162	34,5	155	16
955 080	FTL S4 - d 90	90	80	160	208	38,5	187	10
955 100	FTL S4 - d 110	110	80	160	227	44	187	6

*: Nominal pressure for water at 20 ° C

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

In-line filter unit
FTL S4

15-10-2021

D-955.02-EN-AA

PLAS

955-02/1