

GSM and Wall mounting housing GSM module WITH CABINET



- Compact cabinet IP 67
- Mains Power supply
- Screw terminals

APPLICATIONS

Wall mounting housing receives 1 GSM module, providing power directly from mains power 230 V AC.

DESCRIPTION

The housing has a transparent lid; it is delivered with GSM module already fitted in it. Connections of GSM unit are already done to the screw connectors of housing; easy access by opening the lid. Mains power cord is included with the housing and connected to the screw connectors. The housing has as many cable glands as inputs / outputs available on the GSM module.

The GSM unit also has a USB connection cable, for its configuration via a PC and a software specifically developed for this purpose.

TECHNICAL FEATURES


Dimensions:	180x130x150 mm
Protection:	IP 67
Cabinet material:	ABS
Seal material:	TPE
Screws material:	Polyamide
Mains power supply:	230 V AC (cord supplied)
Cable glands	1 x PG9 for supply 3 x PG7 for inputs E1, E2 and E3 1 x PG7 for output S1
Temperature limit:	60 °C max.

EC Conformity: The device meets the legal requirements of the current European Directives

CODE NUMBERS AND REFERENCES

Code	Reference	Description
248 452	GSM module	Wall mounting housing, supply 230 V AC

DIMENSIONS

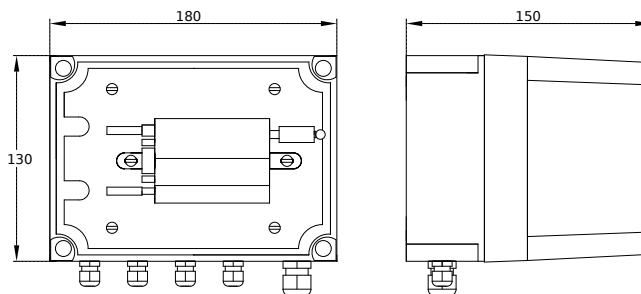

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

GSM and Wall mounting
housing
GSM module WITH CABINET

25-10-2019

D-248.03-EN-AC

248-03/1