

# Bromine sensor BR1



- For water treatment
- Low incidence of pH changes
- Surfactants: partial tolerance
- Temperature: 45 °C max.
- Pressure: 0.5 bar max.

## APPLICATIONS

Water treatment (for water equivalent to drinkable quality)

## TECHNICAL FEATURES

Measured parameter	Hypobromous acid (HOBr)
Disinfection additives	Hypobromous acid (HOBr); bromochloro-dimethylhydantoin (BCDMH)
Measuring system	Closed cell with 3 electrodes and electrolyte
Supply voltage	12 ... 30 V DC (Load 500 to 900 Ω)
Output signal	4 ... 20 mA, screw connectors x2 (1mm <sup>2</sup> ) No galvanic insulation
Operating temperature	5 to 45 °C Automatic temperature compensation
Operating pressure	0.5 bar max. (No vibrations, no pulsating flow)
Flow rate	About 30 l/h
pH operating range	Between pH 6.5 and pH 9.5 Low incidence of pH changes
Zero adjustment	Not necessary (from factory)
Slope calibration	Only 1 point with BAMOPHAR 194 according to directive DPD-1 - Free bromine: DPD-1 - BCDMH: DPD-4
Interferences	Incidence of Cl <sub>2</sub> , ClO <sub>2</sub> and O <sub>3</sub> on measuring signal
Materials	PVC, PEEK, AISI 316 Ti (1.4571)
Dimensions	O.D. 25 mm, length 220 mm (4-20 mA)

**CE Conformity: The instrument meets the legal requirements of the current European Directives**

## CODE NUMBERS AND REFERENCES


Code	Reference	Measuring range	Resolution
193 260	BR1.MA5	0.05 ... 5.0 mg/l	0.1 mg/l
193 261	BR1.MA10	0.05 ... 10 mg/l	0.1 mg/l
Spare parts			
193 903	M48.2	Diaphragme for BR1	
193 964	ECP1.4	Electrolyte for BR1	

*Other versions on request*

### Precautions

Flow rate must be constant and a measuring cell with flow controller is necessary (data-sheet 193-95).

In order to install easily a complete system, we propose assemblies designed for specific applications (on request).

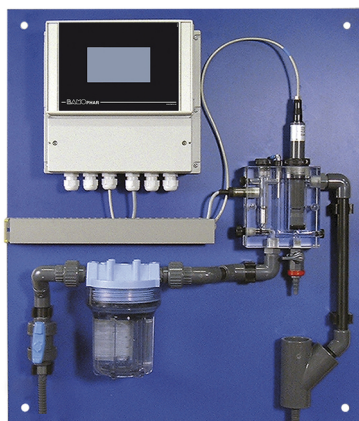

Assembly, sold separately

**BAMO** INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web [www.bamo.eu](http://www.bamo.eu)

Fax +33 (0)1 34 10 16 05 E-mail [export@bamo.fr](mailto:export@bamo.fr)

Bromine sensor  
**BR1**

01-03-2019

D-193.09-EN-AD

CL

193-09/1