


# CONVERTER RS232 / RS 422 - 485

## BAMOTOP 239

### Bi-directional converter, serial interface (Full Duplex)

- Quick and easy set up
- No configuration needed

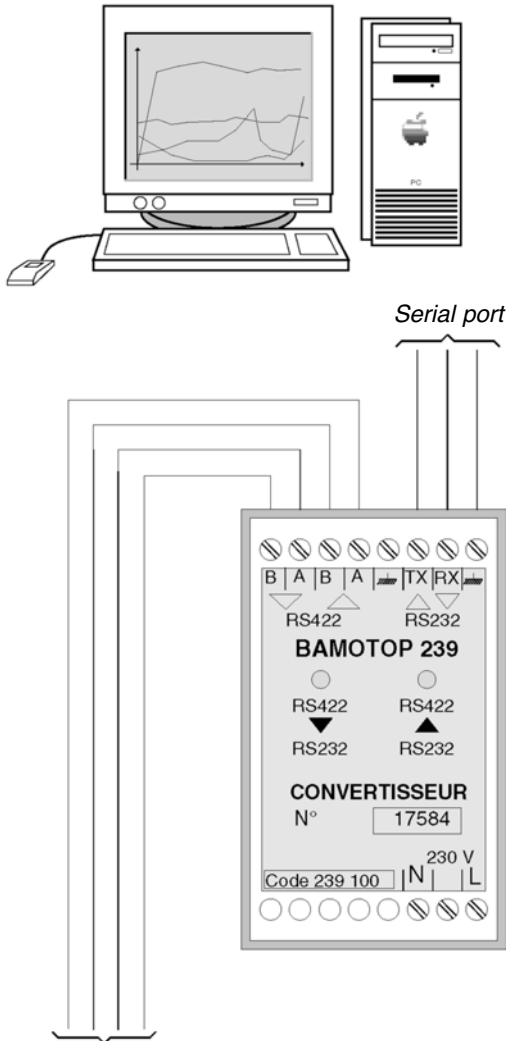

#### APPLICATIONS

For digital data transfer between 2 or more instruments through a serial communication (except with BAMOPHOX):

- Between a computer or a PLC and monitors BAMOPHOX (or BAMOCOR) for pH, chlorine, conductivity, turbidity, dissolved oxygen, flow rate...
- Between a computer and a PLC, etc.
- Through a red with J-BUS protocol.

#### CONVERSION MODE

- Mode RS422 full duplex or half-duplex communication (factory option).
- Mode RS485 half-duplex communication, no reverb.


#### TECHNICAL FEATURES

Input signals:	Tx and Rx
Rate:	110 to 57600 Baud
Maximal distance:	2000 m
Main power:	230 V / 2,5 VA
Status LED:	on Tx and Rx
Housing:	in plastic, H x W x D = 75 x 45 x 105 mm
Mounting:	DIN rail
Connections:	screw connectors


#### CODES NUMBERS AND REFERENCES

Code	Reference	Designation
239 100	BAMOTOP 239 F	Full duplex converter
239 105	BAMOTOP 239 H	Half duplex converter

BAMOPHOX (or BAMOCOR)



#### DIMENSIONS

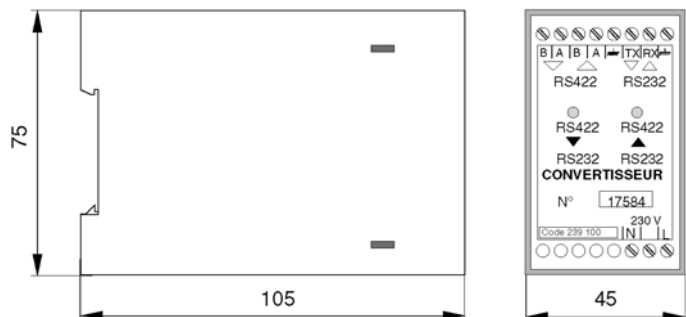

# BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL  
 Tél : (+33) 01 30 25 83 20 - Web : [www.bamo.fr](http://www.bamo.fr)  
 Fax : (+33) 01 34 10 16 05 - E-mail : [info@bamo.fr](mailto:info@bamo.fr)

CONVERTER RS 232 / RS 422 - 485  
**BAMOTOP 239**

25-06-2007

239 I1 01 E

RE

239-01/1