

# Single-Cartridge Mini Filters PF02



- For cold water
- Low flow rates
- Operating pressure: 8 bar
- Operating temperature: 50 °C
- Washable filter cartridges, 50 µm rating

## APPLICATIONS

Water pre-filtration for flow rates from 50 to 500 l/h

## DESCRIPTION

- Robust design
- Brass threaded inserts integrated into the head
- Inlet / outlet threaded connections

## TECHNICAL FEATURES


Fluid	cold water
Operating pressure	max. 8 bar
Operating temperature	max. 50 °C
Head material	polypropylene
Bowl material	polycarbonate
Ring material	polyamide
Seal material	NBR
Connection (threaded)	½" BSP
Cartridge material	Nylon
Cartridge length	60 mm (2 ¾")
Filtration rating	50 µm

**CE compliance :** the device meets the legal requirements of the applicable European Directives.

## CODE NUMBERS AND REFERENCES

Code	Reference	Description
956 216	PF02	PF02 mini filter
956 218	NY50 / PF02	Pack of 10 nylon cartridges 50 µm for PF02

## DIMENSIONS

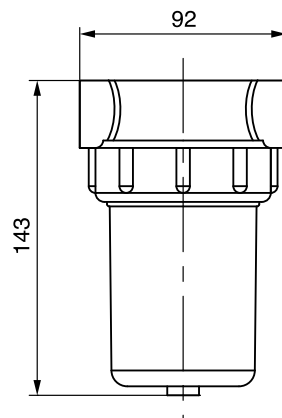

**BAMO** INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web [www.bamo.eu](http://www.bamo.eu)

Fax +33 (0)1 34 10 16 05 E-mail [export@bamo.fr](mailto:export@bamo.fr)

Single-Cartridge Mini Filters  
PF02

14-04-2026

D-956.01-EN-AA

PLAS

956-01 /1